

Secondary air system

Afterburning reduces pollutant emissions

PRODUCT
I N F O R M A T I O N



Secondary air systems – a successful concept



Afterburning reduces pollutant emissions

Immediately after starting a cold spark-ignition engine and until Lambda control starts to take effect, undesirable quantities of harmful HC and CO are emitted. The use of a secondary air system can

significantly reduce the level of such pollutants in the cold starting phase. Committed to constant development, Pierburg is a pioneering system supplier in the field of secondary air systems.

With the benefit of many years of experience as an OE supplier, Pierburg can offer a compact and efficient pollution control system.



The secondary air is injected by a high-speed secondary air pump.



The future belongs to OBD-monitored solenoid secondary air valves.




Pneumatic components are easily checked using simple tools.

A „rich mixture“, i.e. a mixture with excess fuel, is required for starting a cold spark-ignition engine.

Due to the fact that the catalytic converter has not yet reached operating temperature at this point, large quantities of carbon monoxide and unburnt hydrocarbons are produced between cold starting and the onset of Lambda control action – even with „clean“ spark-ignition engines.

The injection of ambient air with a high oxygen content into the exhaust manifold („secondary air“) causes post-oxidation („afterburning“) of the pollutants.

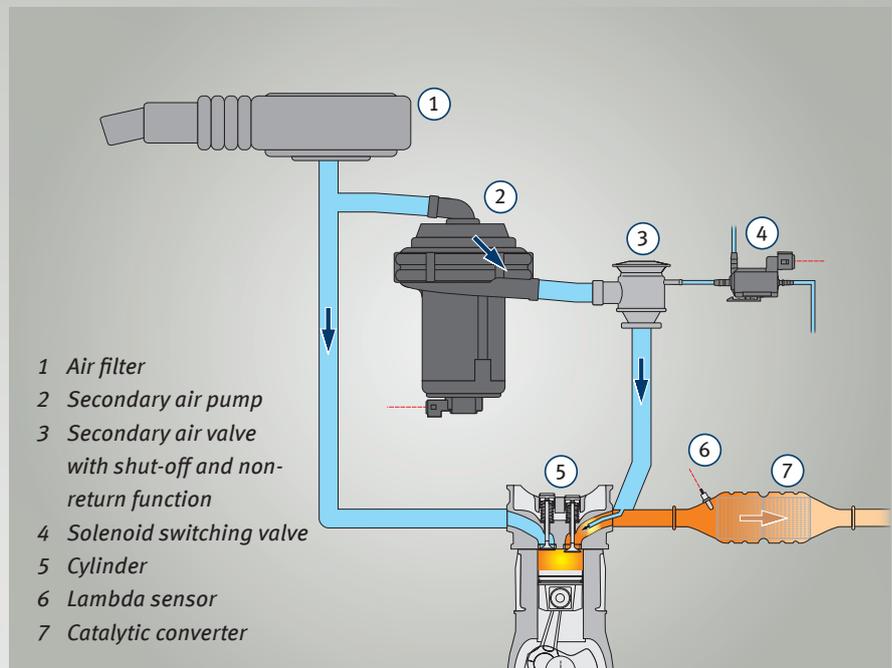

Block diagram of secondary air system (pneumatically actuated)

Secondary air valves



The shut-off function ensures that secondary air is only routed to the exhaust manifold in the cold starting phase.

The integrated non-return function stops exhaust gas, condensate or pressure peaks in the exhaust system (e.g. misfiring) causing damage to the secondary air pump.

Solenoid valves



Solenoid switching valves act as switches for vacuum-controlled components. They are required for opening and closing pneumatic secondary air valves.

The latest generation of secondary air valves manages without actuation by a solenoid switching valve.

Secondary air pumps



Secondary air pumps are high-speed radial blowers.

Thanks to their compact, robust design they can be fitted almost anywhere in the vehicle.

For more details, visit
www.ms-motorservice.com



Motorservice Group

Quality and service from a single source

The Motorservice Group is the sales organisation for the worldwide aftermarket activities of Rheinmetall Automotive. It is a leading supplier of engine components for the independent aftermarket. With the premium brands Kolbenschmidt, Pierburg, TRW Engine Components and the BF brand, Motorservice offers its customers a wide and comprehensive range of top quality products from a single source. As a problem solver for trade and repair shops, the corporation also offers an extensive service package. Motorservice customers benefit from the combined technical know-how of a large international automotive supplier.

Rheinmetall Automotive

Renowned supplier to the international automotive industry

Rheinmetall Automotive is the mobility division of the technology corporation Rheinmetall Group. With its premium brands Kolbenschmidt, Pierburg and Motorservice, Rheinmetall Automotive is a global leader in the relevant markets for air supply systems, emission control and pumps and in the development, manufacture and spare-parts supply of pistons, engine blocks and plain bearings. Low pollutant emissions, good fuel economy, reliability, quality and safety are the main driving forces behind the innovations of Rheinmetall Automotive.

*** OUR HEART BEATS
FOR YOUR ENGINE.**

Motorservice Partner:

Headquarters:

MS Motorservice International GmbH

Wilhelm-Maybach-Straße 14-18

74196 Neuenstadt, Germany

www.ms-motorservice.com

